








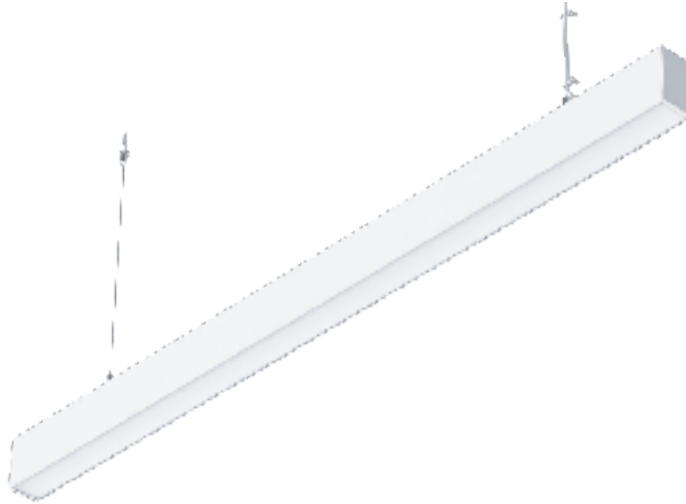


Artume

18W	1530 Lm / 1620 Lm / 1660 Lm			
36W	3060 Lm / 3240 Lm / 3312 Lm			
45W	3825 Lm / 4050 Lm / 4140 Lm			



Scope of application

Office / Medical / Reception rooms /
Conference halls

Description

This type of linear LED luminaire is particularly designed for creative designers and architects with personal style.

The linear LED luminaire is made of different sizes of easy-mounting, premium aluminium profile.

Three mounting types are available: ceiling / wall mounting, pendant mounting and flush-mounting.

Customized sizes are available to satisfy the requirements of different scopes and events.

Advantages

Extruded aluminium fitting with PC lenses, simple and modern design, without screws.

Uniform and pleasant lighting, without any dark area.

Three colours are available for the lamp fitting: white, black and silver. Continuous connection for up to max. 550W.

Fitting

Fitting made of die cast and finished in pure

Optics

Frosted-milky or corrugated polycarbonate lens. Impact, moisture and dust resistant. Premium quality.

General Information

Mounting type: Suspended /
Surface-mounted / Flush-mounted

LED type: SMD

Voltage: 100-240 VAC / 50-60 Hz

Operating temperature: -10 / +35

UGR: <19

CRI: >80

PF: >0.95

Angle: 110



Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
AR18WW-MW/BK/S	18	1530	85	3000	606x50x80	1.2
AR18NW-MW/BK/S	18	1620	90	4000	606x50x80	1.2
AR18W-MW/BK/S	18	1660	92	6000	606x50x80	1.2
AR36WW-MW/BK/S	36	3060	85	3000	1204x50x80	2.2
AR36NW-MW/BK/S	36	3240	90	4000	1204x50x80	2.2
AR36W-MW/BK/S	36	3312	92	6000	1204x50x80	2.2
AR45WW-MW/BK/S	45	3825	85	3000	1504x50x80	2.6
AR45NW-MW/BK/S	45	4050	90	4000	1504x50x80	2.6
AR45W-MW/BK/S	45	4140	92	6000	1504x50x80	2.6

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	Yes	Yes	Yes	External	0-10	Yes	External

Photometric diagrams

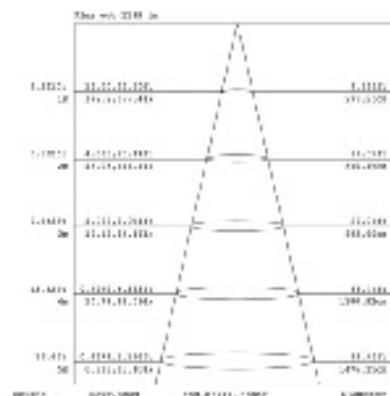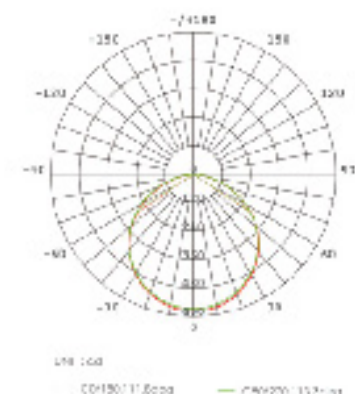

Similar products

Pandia



20W 1850 Lm / 1930 Lm / 2020 Lm

40W 3700 Lm / 3850 Lm / 4040 Lm

50W 4625 Lm / 4825 Lm / 5050 Lm

Modium



30W >4800 Lm **50W** >8000 Lm

35W >5600 Lm **60W** >9600 Lm

40W >6400 Lm **70W** >11200 Lm

Mira



18W 1200 Lm / 1375 Lm / 1415 Lm

24W 1570 Lm / 1730 Lm / 1750 Lm

36W 2440 Lm / 2800 Lm / 2995 Lm

Sigma



9W 874 Lm / 960 Lm / 984 Lm

18W 1675 Lm / 1870 Lm / 1875 Lm

22W 2410 Lm / 2590 Lm / 2770 Lm