

Aten

100 W >13000Lm >15000Lm
150 W >19500Lm >22500Lm
200 W >26000Lm >30000Lm



Scope of application

Industrial / Small-size sports arenas / Halls / Warehouses

Description

Aten is a high-power industrial LED lighting device, providing an efficient alternative to conventional industrial lighting.

It provides a lighting of quality, adjustable and very efficient.

Advantages

It ensures appropriate heat dissipation and uniform light distribution. It may be endowed with an additional light diffuser that can provide various illumination angles.

It allows various types of installation: surface-mounted using an adjustable collar or suspended on a metallic wire or chain.

Fitting

Fitting of cast and finished aluminium, black powder coated

Optics

Polycarbonate lens

General Information

Mounting type: Suspended, surface-mounted

LED type: SMD

Voltage: 100-240 VAC / 50-60 Hz

Operating temperature: -10 / +45

UGR: <25

CRI: >80

PF: >0.92

Angle: 60/90/110


Technical data

| Code | Power ^[W] | Luminosity ^[Lm] | Efficiency ^[Lm] | Colour Temp. ^[K] | Dimensions ^[mm] | Weight ^[kg] |
|---------------------|----------------------|----------------------------|----------------------------|-----------------------------|----------------------------|------------------------|
| AT100WW/NW/W-130-Bk | 100 | >13000 | 130 | 3000/4000/5000 | φ275x166 | 3.8 |
| AT100WW/NW/W-150-Bk | 100 | >15000 | 150 | 3000/4000/5000 | φ275x166 | 3.8 |
| AT100WW/NW/W-190-Bk | 100 | >19000 | 190 | 3000/4000/5000 | φ275x166 | 3.8 |
| AT150WW/NW/W-130-Bk | 150 | >19500 | 130 | 3000/4000/5000 | φ285x166 | 4.5 |
| AT150WW/NW/W-150-Bk | 150 | >22500 | 150 | 3000/4000/5000 | φ285x166 | 4.5 |
| AT150WW/NW/W-190-Bk | 150 | >28500 | 190 | 3000/4000/5000 | φ285x166 | 4.5 |
| AT200WW/NW/W-130-Bk | 200 | >26000 | 130 | 3000/4000/5000 | φ305x181 | 6.7 |
| AT200WW/NW/W-150-Bk | 200 | >30000 | 150 | 3000/4000/5000 | φ305x181 | 6.7 |
| AT200WW/NW/W-190-Bk | 200 | >38000 | 180 | 3000/4000/5000 | φ305x181 | 6.7 |

Accessories

| Product code | Suspension system | Application system | Embedding clips | Emergency kit | 0-10V Dim. driver | DALI Driver | Sensor |
|--------------|-------------------|--------------------|-----------------|---------------|-------------------|-------------|----------|
| | YES | YES | | External | YES | YES | External |

Photometric diagrams

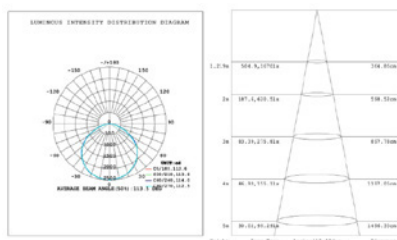

Similar products

Viper



| | |
|-------------|-----------|
| 80W | >10400 Lm |
| 100W | >13000 Lm |
| 150W | >19500 Lm |
| 180W | >23400 Lm |
| 200W | >26000 Lm |

Unix



| | |
|-------------|-----------|
| 50W | >6000 Lm |
| 80W | >9600 Lm |
| 100W | >12000 Lm |
| 120W | >14400 Lm |
| 150W | >18000 Lm |
| 180W | >21600 Lm |
| 200W | >24000 Lm |
| 230W | >27600 Lm |

Ter



| | |
|-------------|-----------|
| 60W | >6600 Lm |
| 120W | >13200 Lm |
| 200W | >22000 Lm |
| 240W | >26400 Lm |
| 400W | >44000 Lm |

Apolo



| | |
|--------------|-----------|
| 500W | >60000 Lm |
| 1000W | >120000 |