

Atria

9W 720 Lm / 760 Lm / 830 Lm

15W 1100 Lm / 1160 Lm / 1330 Lm

20W 1300 Lm / 1330 Lm / 1530 Lm

25W 2260 Lm / 2400 Lm / 2460 Lm

35W 2960 Lm / 3050 Lm / 3200 Lm



Scope of application

Commercial / Office / Conference Halls and Classrooms / Medical / Residential lighting

Description

Atria LED lighting device (flush-mounted, adjustable) may be used for professional retail projects and exhibitions.

Atria benefits from the superior innovative COB LED technology and can successfully replace any metal halide lamp.

Unique and sleek Unibody design using a high-efficiency driver.

Advantages

Adjustable intensity within the range of 10% - 100% for a more flexible and convenient light medium choice.

Up to 50% of energy saving.

Good performance of heat dissipation ensuring a long service life.

Fitting

Fitting made of cast aluminium.

Optics

Frosted-milky white, fine textured PMMA lens.

General Information

Mounting type: Flush-mounted
LED type: COB
Voltage: 110-240 VAC/50-60 Hz
Operating temperature: -10/+45°C
UGR: <19
CRI: >80
PF: >0.95
Angle: 45/55/65



Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
ATR9WW 4/5/6	9	720	80	3000	φ107x54 - φ 95	0.34
ATR9NW 4/5/6	9	760	84	4000	φ107x54 - φ 95	0.34
ATR9W 4/5/6	9	830	92	6000	φ107x54 - φ 95	0.34
ATR15WW 4/5/6	15	1100	73	3000	φ141.5x67 - φ125	0.47
ATR15NW 4/5/6	15	1160	77	4000	φ141.5x67 - φ125	0.47
ATR15W 4/5/6	15	1330	89	6000	φ141.5x67 - φ125	0.47
ATR20WW 4/5/6	20	1300	65	3000	φ157.5x76 - φ140	0.71
ATR20NW 4/5/6	20	1330	67	4000	φ157.5x76 - φ140	0.71
ATR20W 4/5/6	20	1530	77	6000	φ157.5x76 - φ140	0.71
ATR25WW 4/5/6	25	2260	90	3000	φ184.5x88 - φ170	0.9
ATR25NW 4/5/6	25	2400	96	4000	φ184.5x88 - φ170	0.9
ATR25W 4/5/6	25	2460	98	6000	φ184.5x88 - φ170	0.9
ATR35WW 4/5/6	35	2960	85	3000	φ225.5x110 - φ210	1.33
ATR35NW 4/5/6	35	3050	87	4000	φ225.5x110 - φ210	1.33
ATR35W 4/5/6	35	3200	91	6000	φ225.5x110 - φ210	1.33

Accessories

Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
-	-	Yes	External	-	-	External

Photometric diagrams

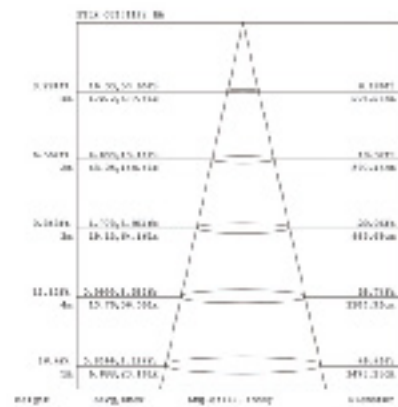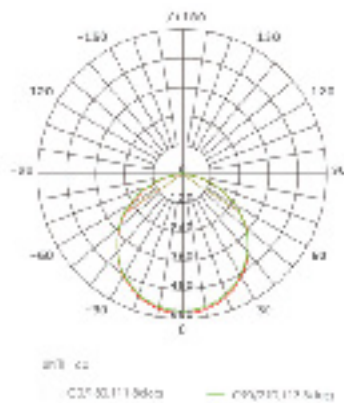

Similar products

Stella



8W	420 Lm / 490 Lm / 500 Lm
12W	740 Lm / 850 Lm / 870 Lm
18W	1220 Lm / 1370 Lm / 1400 Lm
24W	1260 Lm / 1470 Lm / 1500 Lm
30W	2240 Lm / 2520 Lm / 2620 Lm

Caro



10W	600 Lm / 620 Lm / 630 Lm
15W	1260 Lm / 1280 Lm / 1290 Lm

Sirius



11W	840 Lm / 870 Lm / 885 Lm
14W	1110 Lm / 1180 Lm / 1190 Lm

Dolux



9W	820 Lm / 840 Lm / 855 Lm
15W	1380 Lm / 1395 Lm / 1425 Lm
18W	1650 Lm / 1680 Lm / 1710 Lm
25W	2300 Lm / 2325 Lm / 2375 Lm
35W	3220 Lm / 3255 Lm / 3325 Lm