

Aura

15W 1200 Lm / 1230 Lm / 1270 Lm
25W 1650 Lm / 1800 Lm / 1860 Lm
30W 2180 Lm / 2420 Lm / 2450 Lm



Scope of application

Commercial / Office / Conference Halls
and Classrooms / Medical / Advertising

Description

Aura is a luminaire with high-efficiency
COB LED technology.

Simple and sleek look.

Lighting device made of unit cast
aluminium alloy, with a good thermal
dissipation effect.

High-temperature resistant glass.

Advantages

High luminous efficiency and energy saving.

Fitting

Fitting made of cast and finished aluminium
alloy, frosted white or black powder coated.

Optics

PMMA, PC or glass transparent lens.

General Information

Mounting type: Suspended,
Surface-mounted

LED type: COB

Voltage: 220-240 VAC / 50-60 Hz

Operating temperature: -10 / +45

UGR: <19

CRI: >80

PF: >0.95

Angle: 50


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
AU15WW-MW/BK	15	1200	80	3000	φ117x115	0.45
AU15NW-MW/BK	15	1230	82	4000	φ117x115	0.45
AU15W-MW/BK	15	1270	85	6000	φ117x115	0.45
AU20WW-MW/BK	25	1650	83	3000	φ137x115	0.5
AU20NW-MW/BK	25	1800	90	4000	φ137x115	0.5
AU20W-MW/BK	25	1860	93	6000	φ137x115	0.5
AU25WW-MW/BK	30	2180	87	3000	φ170x137	0.7
AU25NW-MW/BK	30	2420	97	4000	φ170x137	0.7
AU25W-MW/BK	30	2450	98	6000	φ170x137	0.7

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	Yes	Yes		External	0-10	Yes	External

Photometric diagrams

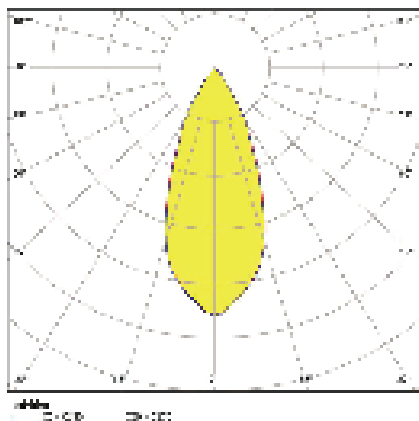

Similar products

Denso TL



5W	350 Lm / 360 Lm / 380 Lm
10W	700 Lm / 720 Lm / 750 Lm
15W	1120 Lm / 1150 Lm / 1180 Lm
20W	1400 Lm / 1440 Lm / 1500 Lm

Borealis



15W	>1200 Lm
25W	>2000 Lm
30W	>2500 Lm

Aurora



40W	>3400 Lm
------------	----------

Antares



20W	1550 Lm / 1610 Lm / 1650 Lm
------------	-----------------------------