

# Borealis

**15W** 1200 Lm / 1250 Lm / 1300 Lm  
**25W** 2000 Lm / 2050 Lm / 2100 Lm  
**30W** 2500 Lm / 2550 Lm / 2600 Lm



## Scope of application

Commercial / Office / Conference Halls  
and Classrooms / Medical / Advertising

## Description

Borealis is a luminaire with high-efficiency COB LED technology.

Simple and sleek look.

Lighting device made of unit cast aluminium alloy, with a good thermal dissipation effect.

High-temperature resistant glass.

## Advantages

High luminous efficiency and energy saving.

## Fitting

Fitting made of cast and finished aluminium alloy, frosted white or black powder coated.

## Optics

PMMA, PC or glass transparent lens.

## General Information

Mounting type: Suspended,  
Surface-mounted

LED type: COB

Voltage: 220-240 VAC / 50-60 Hz

Operating temperature: -10 / +45

UGR: <19

CRI: >80

PF: >0.95

Angle: 40


## Technical data

Code	Power <sup>[W]</sup>	Luminosity <sup>[Lm]</sup>	Efficiency <sup>[Lm / W]</sup>	Colour Temp. <sup>[K]</sup>	Dimensions <sup>[mm]</sup>	Weight <sup>[kg]</sup>
BR15WW-MW/BK	15	1200	80	3000	80x80x103	0.45
BR15NW-MW/BK	15	1250	83	4000	80x80x103	0.45
BR15W-MW/BK	15	1300	86	6000	80x80x103	0.45
BR25WW-MW/BK	25	2000	80	3000	120x120x133	0.5
BR25NW-MW/BK	25	2050	82	4000	120x120x133	0.5
BR25W-MW/BK	25	2100	84	6000	120x120x133	0.5
BR30WW-MW/BK	30	2500	83	3000	150x150x140	0.7
BR30NW-MW/BK	30	2550	85	4000	150x150x140	0.7
BR30W-MW/BK	30	2600	87	6000	150x150x140	0.7

## Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	Yes	Yes		External	0-10	Yes	External

## Photometric diagrams

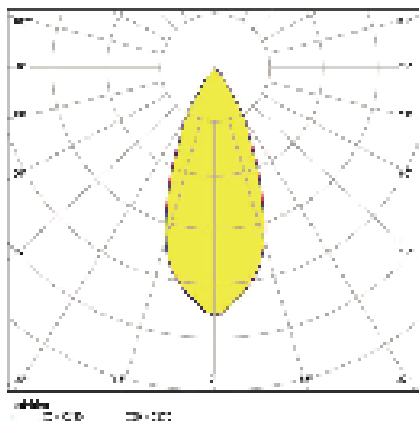

## Similar products

### Denso TL



<b>5W</b>	350 Lm / 360 Lm / 380 Lm
<b>10W</b>	700 Lm / 720 Lm / 750 Lm
<b>15W</b>	1120 Lm / 1150 Lm / 1180 Lm
<b>20W</b>	1400 Lm / 1440 Lm / 1500 Lm

### Aura



<b>15W</b>	>1200 Lm
<b>25W</b>	>1650 Lm
<b>30W</b>	>2180 Lm

### Aurora



<b>40W</b>	>3400 Lm
------------	----------

### Antares



<b>20W</b>	1550 Lm / 1610 Lm / 1650 Lm
------------	-----------------------------