


Claro Twin

18 W 1380 Lm / 1440 Lm / 1560 Lm

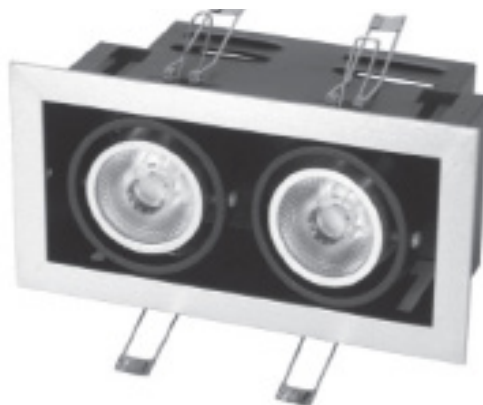

Applications

Commercial / Office / Conference Halls /
Classrooms / Advertising

Description

Claro 18 is an applicable LED lighting device which perfectly replaces existing conventional background light sources.

Advantages

Low light pollution, excellent eye protection.

Fitting

Fitting of cast and finished pure aluminium, frosted-white painted in electrostatic field, with white/grey/black colour.

Optics

Angular lens made of high-precision polycarbonate.

General Information

Mounting type: Flush-mounted
LED type: COB
Voltage: 100-240 VAC / 50 - 60Hz
Operating temperature: -10 / +45
UGR: <19
CRI: >80
PF: >0.95
Angle: 24


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp.	Dimensions ^[mm]	Weight ^[kg]
CL18WW	18	1380	63	3000	210x110x114	0.75
CL18NW	18	1440	69	4000	210x110x114	0.75
CL18W	18	1560	76	6500	210x110x114	0.75

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	YES	YES	YES	Internal	0-10	YES	External

Photometric diagrams

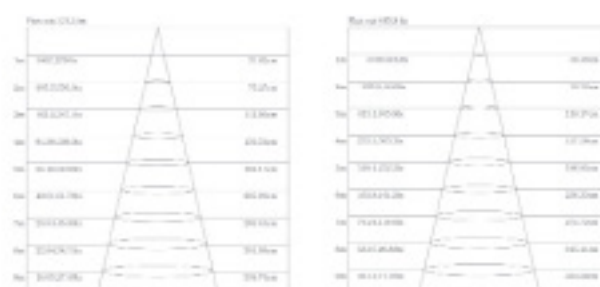

Similar products

Stella



8W	420 Lm / 490 Lm / 500 Lm
12W	740 Lm / 850 Lm / 870 Lm
18W	1220 Lm / 1370 Lm / 1400 Lm
24W	1260 Lm / 1470 Lm / 1500 Lm
30W	2240 Lm / 2520 Lm / 2620 Lm

Atria



9W	680 Lm / 720 Lm / 740 Lm
16W	1100 Lm / 1280 Lm / 1350 Lm
22W	1580 Lm / 1680 Lm / 1780 Lm
30W	2120 Lm / 2300 Lm / 2400 Lm

Denso TL



5W	350 Lm / 360 Lm / 380 Lm
10W	700 Lm / 720 Lm / 750 Lm
15W	1120 Lm / 1150 Lm / 1180 Lm
20W	1400 Lm / 1440 Lm / 1500 Lm

Caro



10W	600 Lm / 620 Lm / 630 Lm
15W	1260 Lm / 1280 Lm / 1290 Lm