


# Dolux

<b>9W</b>	820 Lm / 840 Lm / 855 Lm
<b>15W</b>	1380 Lm / 1395 Lm / 1425 Lm
<b>18W</b>	1650 Lm / 1680 Lm / 1710 Lm
<b>25W</b>	2300 Lm / 2325 Lm / 2375 Lm
<b>35W</b>	3220 Lm / 3255 Lm / 3325 Lm



## Scope of application

Commercial / Office / Conference Halls and Classrooms / Medical / Advertising

## Description

Dolux downlight round LED lighting can perfectly replace conventional background recessed light sources.

## Advantages

Low blindness factor, excellent eye protection.

## Fitting

Fitting made of cast and finished pure aluminium, frosted-white or grey powder coated.

## Optics

Frosted-milky white, fine textured PMMA lens.

## General Information

Mounting type: Suspended / Surface-mounted / Flush-mounted  
LED type: SMD  
Voltage: 110-240 VAC / 50-60 Hz  
Operating temperature: -10 / +45  
UGR: <19  
CRI: >80  
PF: >0.95  
Angle: 45/55/65


## Technical data

Code	Power <sup>[W]</sup>	Luminosity <sup>[Lm]</sup>	Efficiency <sup>[Lm / W]</sup>	Colour Temp. <sup>[K]</sup>	Dimensions <sup>[mm]</sup>	Weight <sup>[kg]</sup>
DL09WW-MW/S	9	820	91	3000	φ105x50 - φ 80	0.3
DL09NW-MW/S	9	840	93	4000	φ105x50 - φ 80	0.3
DL09W-MW/S	9	855	95	6000	φ105x50 - φ 80	0.3
DL15WW-MW/S	15	1380	92	3000	φ123x60 - φ100	0.5
DL15NW-MW/S	15	1395	93	4000	φ123x60 - φ100	0.5
DL15W-MW/S	15	1425	95	6000	φ123x60 - φ100	0.5
DL18WW-MW/S	18	1650	92	3000	φ177x80 - φ150	0.7
DL18NW-MW/S	18	1680	93	4000	φ177x80 - φ150	0.7
DL18W-MW/S	18	1710	95	6000	φ177x80 - φ150	0.7
DL25WW-MW/S	25	2300	92	3000	φ235x100 -	1.3
DL25NW-MW/S	25	2325	93	4000	φ235x100 -	1.3
DL25W-MW/S	25	2375	95	6000	φ235x100 -	1.3
DL35WW-MW/S	35	3220	92	3000	φ235x100 -	1.3
DL35NW-MW/S	35	3255	93	4000	φ235x100 -	1.3
DL35W-MW/S	35	3325	95	6000	φ235x100 -	1.3

## Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	Yes	Yes	Yes	External	0-10	Yes	External

## Photometric diagrams

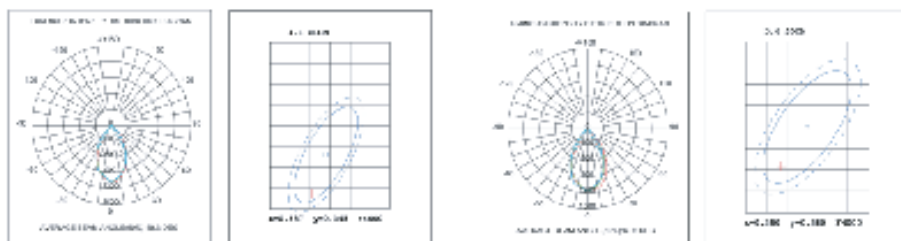

## Similar products

### Stella



<b>8W</b>	420 Lm / 490 Lm / 500 Lm
<b>12W</b>	740 Lm / 850 Lm / 870 Lm
<b>18W</b>	1220 Lm / 1370 Lm / 1400 Lm
<b>24W</b>	1260 Lm / 1470 Lm / 1500 Lm
<b>30W</b>	2240 Lm / 2520 Lm / 2620 Lm

### Atria



<b>9W</b>	680 Lm / 720 Lm / 740 Lm
<b>16W</b>	1100 Lm / 1280 Lm / 1350 Lm
<b>22W</b>	1580 Lm / 1680 Lm / 1780 Lm
<b>30W</b>	2120 Lm / 2300 Lm / 2400 Lm

### Caro



<b>10W</b>	600 Lm / 620 Lm / 630 Lm
<b>15W</b>	1260 Lm / 1280 Lm / 1290 Lm

### Denso TL



<b>5W</b>	350 Lm / 360 Lm / 380 Lm
<b>10W</b>	700 Lm / 720 Lm / 750 Lm
<b>15W</b>	1120 Lm / 1150 Lm / 1180 Lm
<b>20W</b>	1400 Lm / 1440 Lm / 1500 Lm