


Float

40W 3600 Lm / 3800 Lm / 3840 Lm

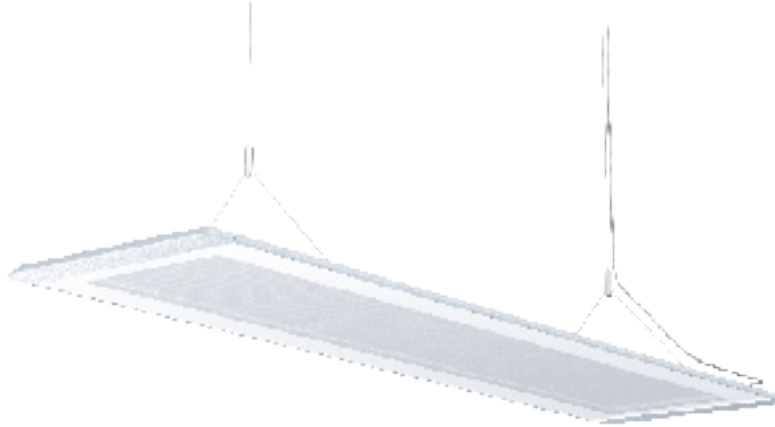

Scope of application

Commercial / Office / Conference Halls and Classrooms / Medical / Advertising

Description

Float Ponte panel can perfectly replace conventional luminaires.

Due to its light guiding lens, Float has a uniform and efficient luminous flux, with reduced brightness level of the light, reduced light pollution and excellent eye protection.

Advantages

Modern and simple design. Simple, easy to assemble structure.

Energy saving and ecological, in conformity with CE RoHS.

High-efficiency thermal management; operation at low temperatures; high stability of continuous operation.

Fitting

Fitting made of cast and finished pure aluminium, powder coated, frosted white RAL9003.

Optics

Frosted-milky white, fine textured PMMA lens.

General Information

Mounting type: Suspended / Surface-mounted / Flush-mounted

LED type: SMD

Voltage: 200-240 VAC / 50 Hz

Operating temperature: -10 / +40

UGR: <19

CRI: >80

PF: >0.95

Angle: 120



Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
FL40WW-MW/Bk	40	3600	90	3000	300x1200x8	3.2
FL40NW-MW/Bk	40	3800	95	4000	300x1200x8	3.2
FL40W-MW/Bk	40	3840	96	6000	300x1200x8	3.2


Accessories


Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	Yes	Yes	Yes	External	0-10	Yes	External

Photometric diagrams

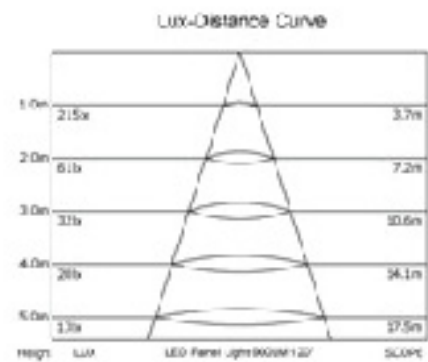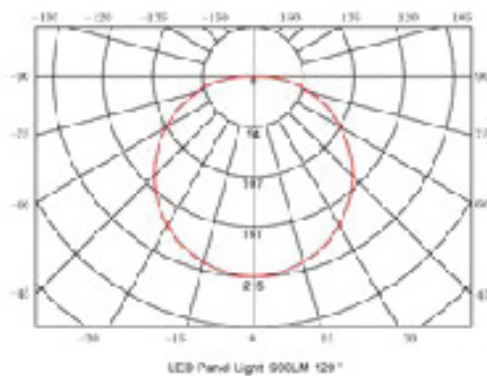

Similar products

Quadro	
	40W 3490 Lm / 3780 Lm / 3790 Lm
	55W 3190 Lm / 3575 Lm / 3850 Lm

Helia	
	55W 3190 Lm / 3575 Lm / 3850 Lm

Arya	
	24W 1185 Lm / 1295 Lm / 1440 Lm

Ponte	
	40W 3490 Lm / 3780 Lm / 3790 Lm