


FRAM



Power^[W] / Luminosity^[Lm]

- 40 W > 3600 Lm

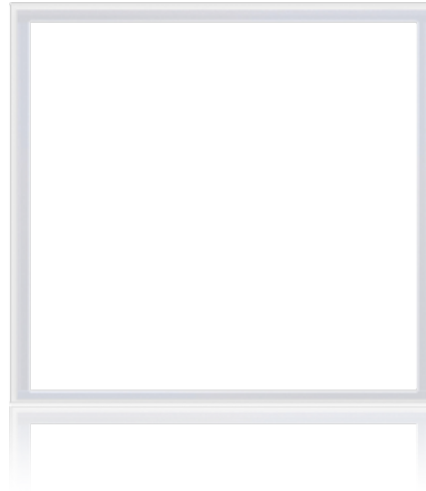

General information

- Mounting type: Applied
- Type LED: SMD
- Voltage: 200-240 VAC / 50-60Hz
- Operational temperature: -10 / +40
- UGR: <19
- CRI: >80
- PF: >0.9
- Angle: 110

Applications

- Commercial, Residential, Office, Horeca, Medical lighting

Description

- The square LED panel can perfectly replace traditional fixtures.
- The luminaire features a uniform and efficient light beam, low glare, low dazzle factor and excellent eye protection.
- It can be widely used as interior lighting in shops, supermarkets, shopping malls and hospitals.

Benefits

- Simple structure, easy to assemble.
- Energy saving; environmentally friendly; CE and RoHS compliant. High efficiency thermal management; low temperature power supply, high stability of continuous operation.

Body & Optics

- White RAL9003 lamp body, modern and simple design.
- Fine textured PMMA local disperser.

FRAM

Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm/W]	Colour temp. ^[K]	Measurements ^[mm]	Weight ^[kg]
FRM40W-WH	40	3600	90	6000K	595x595x18	1.2
FRM40NW-WH	40	3600	90	4000K	595x595x18	1.2
FRM40WW-WH	40	3600	90	3000K	595x595x18	1.2

Code	System of suspension	Application system	Recessed clips	Kit of emergency	Driver size 0-10V	Driver DALI	Sensor
All codes	NA	Yes	NA	External	External	External	External

Accessories



Suspension system