



GLO

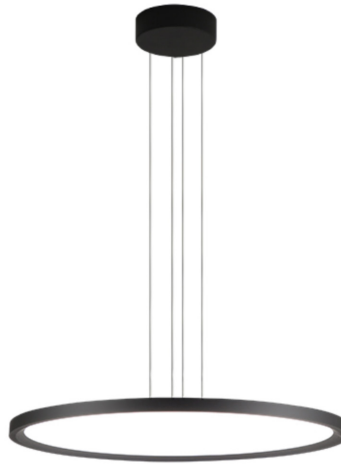

Power^[W] / Luminosity^[Lm]

- 36 W > 2700 Lm
- 48 W > 3600 Lm
- 72 W > 5400 Lm
- 96 W > 7200 Lm
- 120 W > 9000 Lm



Description

- The LED Glo lighting system can replace traditional fixtures perfectly.
- Thanks to the light guide diffuser, the lamp has a uniform and efficient light beam, low glare, low dazzle factor and excellent eye protection.

General information

- Mounting type: Suspended
- Type LED: SMD
- Voltage: 200-240 VAC / 50-60Hz
- Operational temperature: -10 / +50
- UGR: <19
- CRI: >80
- PF: >0.9
- Angle: 90

Benefits

- Modern and simple design
- Simple structure, easy to install.
- Energy saving and environmentally friendly, CE RoHS compliant.
- High efficiency thermal management; low temperature operation; high stability of continuous operation.

Applications

- Commercial, Residential, Office, Horeca, Medical lighting

Body & Optics

- Body in pure aluminium, cast and finished, electrostatically painted.
- PMMA disperser, matte milky-white

GLO

Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm/W]	Colour temp. ^[K]	Measurements ^[mm]	Weight ^[kg]
GLO36W-WH/BK/S	36	2700	75	6000K	Φ400	2.3
GLO36NW-WH/BK/S	36	2700	75	4000K	Φ400	2.3
GLO36WW-WH/BK/S	36	2700	75	3000K	Φ400	2.3
GLO48W-WH/BK/S	48	3600	75	6000K	Φ600	3
GLO48NW-WH/BK/S	48	3600	75	4000K	Φ600	3
GLO48WW-WH/BK/S	48	3600	75	3000K	Φ600	3
GLO72W-WH/BK/S	72	5400	75	6000K	Φ800	3.4
GLO72NW-WH/BK/S	72	5400	75	4000K	Φ800	3.4
GLO72WW-WH/BK/S	72	5400	75	3000K	Φ800	3.4
GLO96W-WH/BK/S	96	7200	75	6000K	Φ1000	3.9
GLO96NW-WH/BK/S	96	7200	75	4000K	Φ1000	3.9
GLO96WW-WH/BK/S	96	7200	75	3000K	Φ1000	3.9
GLO120W-WH/BK/S	120	9000	75	6000K	Φ1200	4.2
GLO120NW-WH/BK/S	120	9000	75	4000K	Φ1200	4.2
GLO120WW-WH/BK/S	120	9000	75	3000K	Φ1200	4.2

Code	System of suspension	Application system	Recessed clips	Kit of emergency	Driver size 0-10V	Driver DALI	Sensor
All codes	Yes	NA	NA	External	External	External	External