














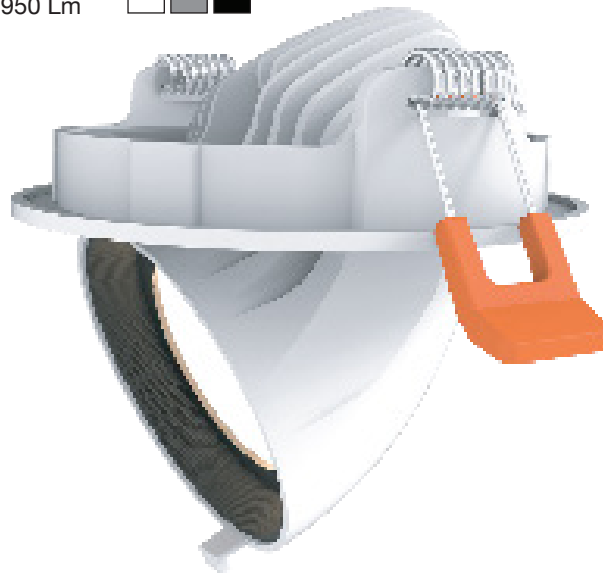


Kaven

15W	1120 Lm / 1140 Lm / 1150 Lm			
25W	1950 Lm / 1970 Lm / 1980 Lm			
30W	2390 Lm / 2420 Lm / 2430 Lm			
40W	3400 Lm / 3650 Lm / 3680 Lm			
60W	4800 Lm / 4900 Lm / 4950 Lm			



Scope of application

Commercial / Office / Conference Halls
and Classrooms / Medical / Advertising

Description

Kaven is a recessed LED lighting device with an adjustable angle.

It incorporates the innovative COB LED technology and can successfully replace any light fittings with metal halide technology.

It may be used for professional retail projects and exhibitions.

Adjustable light intensity within the range of 10%-100%, for a more flexible and convenient light medium choice.

Unique and sleek design.

Advantages

Up to 50% of energy saving.

Good thermal dissipation for a long service life.

Unibody design with high-efficiency driver.

Fitting

Fitting made of cast and finished pure aluminium, frosted white, grey, or black powder coated.

Optics

Clear, tempered and secured glass lens.

General Information

Mounting type: Flush-mounted
LED type: COB
Voltage: 110-240 VAC / 50-60 Hz
Operating temperature: -10 / +45
UGR: <19
CRI: >80
PF: >0.90
Angle: 12/24/40





Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
KV15WW-MW/S	15	1120	75	3000	□85x94x72	0.4
KV15NW-MW/S	15	1140	76	4000	□85x94x72	0.4
KV15W-MW/S	15	1150	77	6000	□85x94x72	0.4
KV25WW-MW/S	25	1950	78	3000	□120x130x102	0.8
KV25NW-MW/S	25	1970	79	4000	□120x130x102	0.8
KV25W-MW/S	25	1980	79	6000	□120x130x102	0.8
KV30WW-MW/S	30	2390	80	3000	□140x128x121	1.2
KV30NW-MW/S	30	2420	81	4000	□140x128x121	1.2
KV30W-MW/S	30	2430	81	6000	□140x128x121	1.2
KV40WW-MW/S	40	3400	85	3000	□170x180x147	1.3
KV40NW-MW/S	40	3650	91	4000	□170x180x147	1.3
KV40W-MW/S	40	3680	92	6000	□170x180x147	1.3
KV60WW-MW/S	60	4800	80	3000	□225x235x190	1.4
KV60NW-MW/S	60	4900	82	4000	□225x235x190	1.4
KV60W-MW/S	60	4950	83	6000	□225x235x190	1.4

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES			Yes	External	0-10	Yes	External

Photometric diagrams

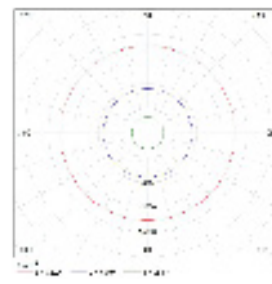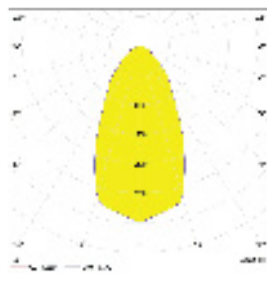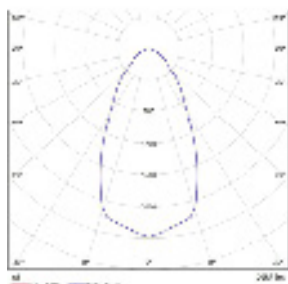

Similar products

Stella	
	8W 420 Lm / 490 Lm / 500 Lm
	12W 740 Lm / 850 Lm / 870 Lm
	18W 1220 Lm / 1370 Lm / 1400 Lm
	24W 1260 Lm / 1470 Lm / 1500 Lm
	30W 2240 Lm / 2520 Lm / 2620 Lm

Atria	
	9W 680 Lm / 720 Lm / 740 Lm
	16W 1100 Lm / 1280 Lm / 1350 Lm
	22W 1580 Lm / 1680 Lm / 1780 Lm
	30W 2120 Lm / 2300 Lm / 2400 Lm

Dolux	
	9W 820 Lm / 840 Lm / 855 Lm
	15W 1380 Lm / 1395 Lm / 1425 Lm
	18W 1650 Lm / 1680 Lm / 1710 Lm
	25W 2300 Lm / 2325 Lm / 2375 Lm
	35W 3220 Lm / 3255 Lm / 3325 Lm

Denso TL	
	5W 350 Lm / 360 Lm / 380 Lm
	10W 700 Lm / 720 Lm / 750 Lm
	15W 1120 Lm / 1150 Lm / 1180 Lm
	20W 1400 Lm / 1440 Lm / 1500 Lm