


# MINETTE

---

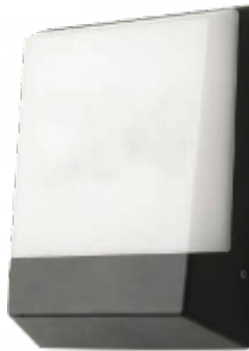

## Power<sup>[W]</sup> / Luminosity<sup>[Lm]</sup>

---

- 11 W > 1040 Lm
- 13 W > 1200 Lm



## General information

---

- Mounting type: Applied
- Type LED: SMD
- Voltage: 200-240 VAC / 50-60Hz
- Operational temperature: -25 / +60
- UGR: <19
- CRI: >80
- PF: >0.9
- Angle: 110

## Applications

---

- Outdoor, Commercial, Office and Residential Lighting

## Description

---

- Design springs from life, and life changes due to design.
- Minette is a lighting fixture for the house number.
- Simple geometric appearance. Installed in front of the door or on the street, the number is highlighted and the road is also illuminated.
- Minette can also have a light sensor or an infrared sensor.
- It is moisture resistant.

## Benefits

---

- Modern and simple design
- Simple structure, easy to install.
- It saves energy compared to traditional appliances and is environmentally friendly.

## Body & Optics

---

- Aluminium alloy body, cast and finished, electrostatically painted, black.
- Transparent, tempered, PC disperser.

# MINETTE

## Technical data

| Code          | Power <sup>[W]</sup> | Luminosity <sup>[Lm]</sup> | Efficiency <sup>[Lm/W]</sup> | Colour temp. <sup>[K]</sup> | Measurements <sup>[mm]</sup> | Weight <sup>†[kg]</sup> |
|---------------|----------------------|----------------------------|------------------------------|-----------------------------|------------------------------|-------------------------|
| MNT13WW-BK    | 13                   | 1200                       | 92                           | 3000K                       | 160x210x58                   | 0.9                     |
| MNT13NW-BK    | 13                   | 1200                       | 92                           | 4000K                       | 160x210x58                   | 0.9                     |
| MNT13W-BK     | 13                   | 1200                       | 92                           | 6000K                       | 160x210x58                   | 0.9                     |
| MN11WW-BK-IR  | 11                   | 1040                       | 95                           | 3000K                       | 160x210x58                   | 0.9                     |
| MNT11NW-BK-IR | 11                   | 1040                       | 95                           | 4000K                       | 160x210x58                   | 0.9                     |
| MNT11W-BK-IR  | 11                   | 1040                       | 95                           | 6000K                       | 160x210x58                   | 0.9                     |
| MN11WW-BK-M   | 11                   | 1040                       | 95                           | 3000K                       | 160x210x58                   | 0.9                     |
| MNT11NW-BK-M  | 11                   | 1040                       | 95                           | 4000K                       | 160x210x58                   | 0.9                     |
| MNT11W-BK-M   | 11                   | 1040                       | 95                           | 6000K                       | 160x210x58                   | 0.9                     |

| Code      | System of suspension | Application system | Recessed clips | Kit of emergency | Driver size 0-10V | Driver DALI | Sensor |
|-----------|----------------------|--------------------|----------------|------------------|-------------------|-------------|--------|
| All codes | NA                   | Yes                | NA             | NA               | NA                | NA          | NA     |