

Monaco

40 W 3900 Lm

75 W 7350 Lm



100 W 9400 Lm

150 W 14200 Lm



Applications

Public / Street / Perimeter / Parking

Description

Monaco lighting devices provide an efficient and aesthetic alternative to conventional public lighting.

Monaco is distinguished by its high-quality, adjustable and very efficient lighting, with energy consumption reduced by up to 80% compared to conventional light sources.

Its modern shape offers a sleek, high-quality alternative.

Advantages

Easy mounting on a bracket.

Long service life.

Optimum, economic, easily controllable lighting.

Not containing chemicals that could harm the environment.

Optics

Polycarbonate or glass diffuser with angle lenses for perimeter lighting.

General Information

Mounting type: -

LED type: SMD

Voltage: 100-240VAC/50-60Hz

Operating temperature: -25/+40 C

UGR: <19

CRI: >70

PF: >0.9

Angle: 145



IP65 IK08



Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
MN40W-S	40	3900	98	6000	645x265x125	5.3
MN75W-S	75	7350	98	6000	645x265x125	5.3
MN100W-S	100	9400	94	6000	645x265x125	5.3
MN150W-S	150	14200	95	6000	745x320x140	8.5

Accessories

Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
-	-	-	External	0-10	-	External

Photometric diagrams

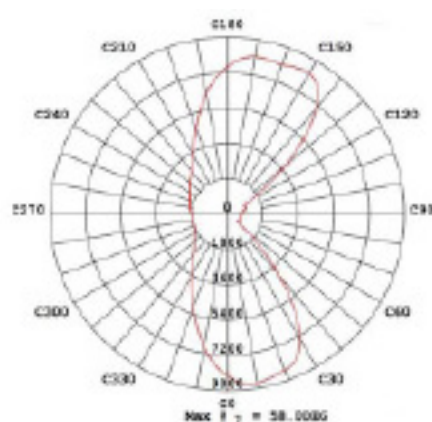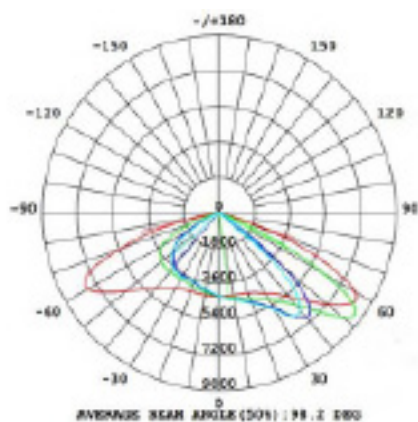

Similar products

Stockholm



30W / 50W / 100W / 150W >110 Lm/W

Hagen



50W / 80W / 100W / 120W >110 Lm/W

Nice



30W / 50W / 100W / 120 W >100 Lm/W

Dresden



57W >105 Lm/W