



Nucleo Roll

5 W 410 Lm / 410 Lm / 410 Lm

10 W 820 Lm / 820 Lm / 820 Lm

20 W 1700 Lm / 1700 Lm / 1700 Lm

30 W 2520 Lm / 2520 Lm / 2520 Lm

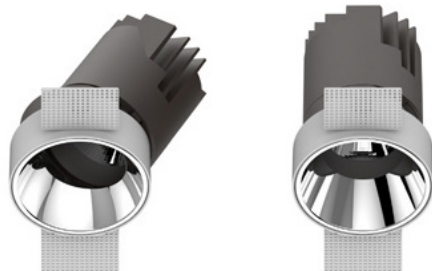

Applications

Commercial / Office / Conference Halls /
Classrooms / Medical / Advertising

Description

Nucleo is a downlight round LED light which can perfectly replace conventional background recessed light sources.

Advantages

Adjustable direction.

Low light pollution, excellent eye protection.

Fixture

Fixture made of cast and finished aluminium alloy, frosted-white, grey or black powder-coated.

Optics

Transparent and tempered PC or glass lens.

General Information

Mounting type: Flush-mounted
LED TYPE: COB
Voltage: 100-240 VAC / 50 - 60 Hz
Operating temperature: -10 / +45
UGR: <19
CRI: >80
PF: >0.95
Angle: 12/24/40


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp.	Dimensions ^[mm]	Weight ^[kg]
NCS05WW-MW/S/	5	410	82	3000	φ60x85 / φ55	0.7
NCS05NW-MW/S/BK	5	410	82	4000	φ60x85 / φ55	0.7
NCS05W-MW/S/BK	5	410	82	6000	φ60x85 / φ55	0.7
NCS10WW-MW/S/	10	820	82	3000	φ82x103 / φ75	0.9
NCS10NW-MW/S/BK	10	820	82	4000	φ82x103 / φ75	0.9
NCS10W-MW/S/BK	10	820	82	6000	φ82x103 / φ75	0.9
NCS15WW-MW/S/	20	1700	85	3000	φ105X126 / φ95	1.1
NCS15NW-MW/S/BK	20	1700	85	4000	φ105X126 / φ95	1.1
NCS15W-MW/S/BK	20	1700	85	6000	φ105X126 / φ95	1.1
NCS20WW-MW/S/	30	2520	84	3000	φ128X148 / φ120	1.2
NCS20NW-MW/S/BK	30	2520	84	4000	φ128X148 / φ120	1.2
NCS20W-MW/S/BK	30	2520	84	6000	φ128X148 / φ120	1.2

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES			YES	External	0-10	YES	External

Photometric diagrams

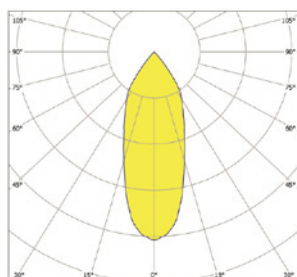

Similar products

Stella



8W	420 Lm / 490 Lm / 500 Lm
12W	740 Lm / 850 Lm / 870 Lm
18W	1220 Lm / 1370 Lm / 1400 Lm
24W	1260 Lm / 1470 Lm / 1500 Lm
30W	2240 Lm / 2520 Lm / 2620 Lm

Atria



9W	680 Lm / 720 Lm / 740 Lm
16W	1100 Lm / 1280 Lm / 1350 Lm
22W	1580 Lm / 1680 Lm / 1780 Lm
30W	2120 Lm / 2300 Lm / 2400 Lm

Dolux



9W	820 Lm / 840 Lm / 855 Lm
15W	1380 Lm / 1395 Lm / 1425 Lm
18W	1650 Lm / 1680 Lm / 1710 Lm
25W	2300 Lm / 2325 Lm / 2375 Lm
35W	3220 Lm / 3255 Lm / 3325 Lm

Denso TL



5W	350 Lm / 360 Lm / 380 Lm
10W	700 Lm / 720 Lm / 750 Lm
15W	1120 Lm / 1150 Lm / 1180 Lm
20W	1400 Lm / 1440 Lm / 1500 Lm