

Ponte

36 W 3200 Lm / 3600 Lm



Scope of application

Commercial / Office / Conference Halls
and Classrooms / Medical / Advertising

Description

Ponte LED panel perfectly replaces
conventional luminaires.

Ponte has a uniform and efficient luminous
flux thanks to its light-guiding lens, with
reduced brightness levels, reduced
blindness factor and excellent eye
protection.

Advantages

Modern and simple design. Simple, easy to
assemble structure.

Energy saving and ecological in conformity
with CE RoHS.

High-efficiency thermal management;
operation at low temperatures; high stability
of continuous operation.

Fitting

Fitting made of cast and finished pure
aluminium, powder-coated, frosted white
RAL9003.

Optics

Frosted-milky white, fine textured PMMA
lens.

General Information

Mounting type: Suspended / Surface-
mounted / Flush-mounted

LED type: SMD

Voltage: 200-240 VAC / 50 Hz

Operating temperature: -10 / +40

UGR: <19

CRI: >80

PF: >0.95

Angle: 110



Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
PT36WW-MW	36	3200	87	3000	300x1200x8	2.6
PT36NW-MW	36	3600	95	4000	300x1200x8	2.6
PT36W-MW	36	3600	95	6000	300x1200x8	2.6

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ALL CODES	YES	YES	YES	External	0-10	YES	External

Photometric diagrams

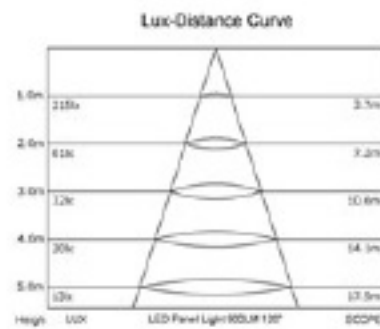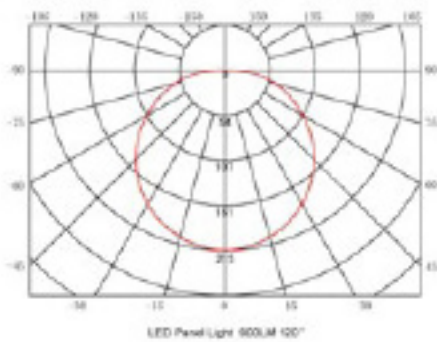

Similar products

Quadro	
	40 W 3490 Lm / 3780 Lm / 3790 Lm
	55 W 3190 Lm / 3575 Lm / 3850 Lm

Helia	
	55 W 3190 Lm / 3575 Lm / 3850 Lm

Arya	
	24 W 1185 Lm / 1295 Lm / 1440 Lm

Float	
	40 W 3600 Lm / 3800 Lm / 3840 Lm