

Quadro

36 W 3200 Lm / 3600 Lm / 3600 Lm



Applications

Commercial / Office / Conference Halls /
Classrooms / Medical / Advertising

Description

This square LED panel can perfectly replace conventional luminaires.

It generates a uniform and efficient luminous flux by using a PMMA light guiding plate with reduced brightness levels, reduced blindness factors and excellent eye protection.

The panel is mostly used in stores, supermarkets, malls and hospitals.

Advantages

Simple, easy to assemble structure.

Energy saving and ecological, in conformity with CE and RoHS.

High-efficiency thermal management; power supply at low temperatures; high stability of continuous operation.

Fitting

White RAL9016 lamp fitting, modern and simple design, made of extruded aluminium without joints.

Optics

Frosted-milky white, fine textured PMMA lens.

General Information

Mounting type: Suspended / Surface-mounted / Flush-mounted

LED type: SMD EPISTAR

Voltage: 200-240 VAC / 50 Hz

Operating temperature: -10 / +40°C

UGR: <19

CRI: >80

PF: >0.95

Angle: 110



IP40 IK02


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
QD36WW-MW	36	3200	89 Lm/w	3000	595x595x10	2.4
QD36WW-NW	36	3600	100 Lm/w	4000	595x595x10	2.4
QD36WW-CW	36	3600	100 Lm/w	5000	595x595x10	2.4

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
	YES	YES	YES	External	YES	YES	External

Photometric diagrams

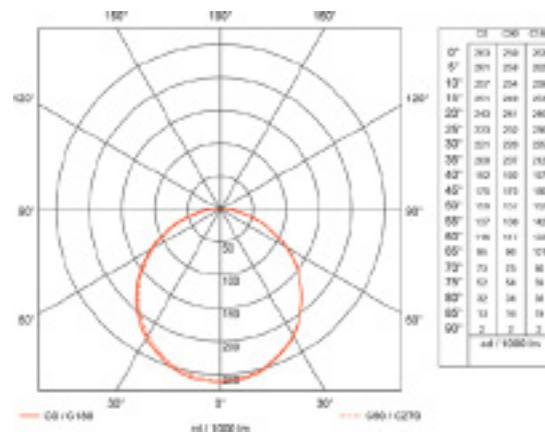

Similar products

Lucky



36 W 3240 Lm

Ponte



40 W 3490 Lm / 3780 Lm / 3790 Lm

Arya



24 W 1185 Lm / 1295 Lm / 1440 Lm

Hella



55 W 3190 Lm / 3575 Lm / 3850 Lm

Optional equipment

Prismatic lens



Innovative plug-in connector



Reinforced rear plate

