

# Stella

**8W** 420 Lm / 490 Lm / 500 Lm   
**12W** 740 Lm / 850 Lm / 870 Lm   
**18W** 1220 Lm / 1370 Lm / 1400 Lm

**24W** 1750 Lm / 2040 Lm / 2130 Lm   
**30W** 2240 Lm / 2520 Lm / 2620 Lm



## Scope of application

Commercial / Office / Conference Halls /  
Classrooms / Medical / Residential

## Description

Stella downlight round LED lighting can perfectly replace conventional recessed light sources.

Available as dimming or non-dimming version.

Its thin body allows you to mount it in reduced thickness ceiling.

It may be optimally used in hotels, offices and commercial spaces.

## Advantages

Enhanced lighting effect, uniform light, low blindness factor, excellent eye protection.

Optimized cooling effect and operation under low temperature conditions due to its aluminium fitting.

## Fitting

Fitting made of cast ADC12 aluminium.

## Optics

PMMA lens with double plates, frosted-milky white, fine textured.

## General Information

**Mounting type:** Flush-mounted

**LED type:** SMD

**Voltage:** 200-240 VAC / 50-60 Hz

**Operating temperature:** -10 / +40°C

**UGR:** <19

**CRI:** >80

**PF:** >0.95

**Angle:** 110



## Technical data

Code	Power <sup>[W]</sup>	Luminosity <sup>[Lm]</sup>	Efficiency <sup>[Lm / W]</sup>	Colour Temp. <sup>[K]</sup>	Dimensions <sup>[mm]</sup>	Weight <sup>[kg]</sup>
ST08-WW	8	420	53	3000	□115	0.22
ST08-NW	8	490	61	4000	□115	0.22
ST08-W	8	500	63	6000	□115	0.22
ST12-WW	12	740	62	3000	□145	0.3
ST12-NW	12	850	71	4000	□145	0.3
ST12-W	12	870	73	6000	□145	0.3
ST18-WW	18	1220	68	3000	□175	0.4
ST18-NW	18	1370	76	4000	□175	0.4
ST18-W	18	1400	78	6000	□175	0.4
ST24-WW	24	1750	73	3000	□210	0.6
ST24-NW	24	2040	85	4000	□210	0.6
ST24-W	24	2130	89	6000	□210	0.6
ST30-WW	30	2240	75	3000	□245	0.72
ST30-NW	30	2520	84	4000	□245	0.72
ST30-W	30	2620	87	6000	□245	0.72

## Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
ST08, ST12, ST18	-	-	Yes	External	0-10	-	External
ST24/ ST30	-	-	Yes	External	0-10	Yes	External

## Photometric diagrams

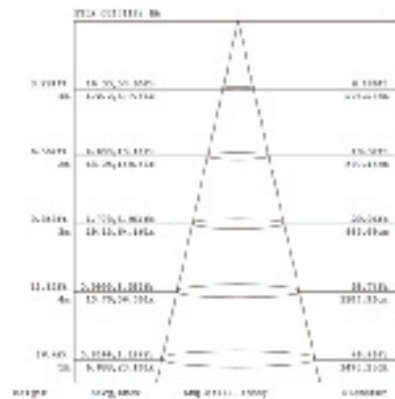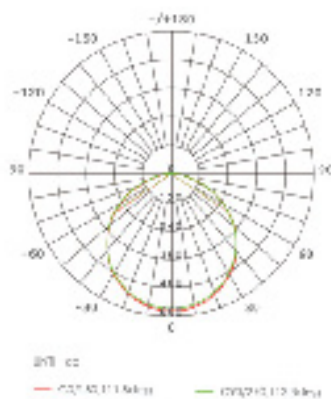

## Similar products

### Caro



**10W** 600 Lm / 620 Lm / 630 Lm  
**15W** 1260 Lm / 1280 Lm / 1290 Lm

### Atria



**9W** 680 Lm / 720 Lm / 740 Lm  
**16W** 1100 Lm / 1280 Lm / 1350 Lm  
**22W** 1580 Lm / 1680 Lm / 1780 Lm  
**30W** 2120 Lm / 2300 Lm / 2400 Lm

### Sirius



**11W** 840 Lm / 870 Lm / 885 Lm  
**14W** 1110 Lm / 1180 Lm / 1190 Lm

### Dolux



**9W** 820 Lm / 840 Lm / 855 Lm  
**15W** 1380 Lm / 1395 Lm / 1425 Lm  
**18W** 1650 Lm / 1680 Lm / 1710 Lm  
**25W** 2300 Lm / 2325 Lm / 2375 Lm  
**35W** 3220 Lm / 3255 Lm / 3325 Lm