

Ter

60W	>6600 Lm
120W	>13200 Lm
200W	>22000 Lm
240W	>26400 Lm
400W	>44000 Lm



Scope of application

Industrial / Halls / Warehouses

Description

Ter is an industrial linear LED lighting device providing an effective alternative to conventional industrial lighting.

It provides a lighting of quality, adjustable and very efficient.

High-temperature transparent resistant glass.

Advantages

Reduced energy consumption by up to 80% compared to conventional light sources.

Sleek quality look.

Fitting

Fitting made of die cast and finished pure aluminium.

Impact, moisture and dust resistant.

Optics

Polycarbonate or glass diffuser with clear lenses.

General Information

Mounting type: Suspended, Surface-mounted, Flush-mounted

LED type: SMD

Voltage: 100-240 VAC / 50-60 Hz

Operating temperature: -25 / +60

UGR: <19

CRI: >80

PF: >0.95

Angle: 135


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
TR60WW/NW/W-S/BK	60	>6600	>110	4000K/5700K/6500K	330x178x110	3.9
TR120WW/NW/W-S/BK	120	>13200	>110	4000K/5700K/6500K	644x178x110	3.9
TR200WW/NW/W-S/BK	200	>22000	>110	4000K/5700K/6500K	965x178x110	6.7
TR240WW/NW/W-S/BK	240	>26400	>110	4000K/5700K/6500K	965x178x110	6.7
TR400WW/NW/W-S/BK	400	>44000	>110	4000K/5700K/6500K	965x178x110	6.7

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
TR-60 / TR-120	Yes	Yes		External	0-10	NA	External
TR-200 / TR-240 / TR-400	Yes	Yes		External	0-10	Yes	External

Photometric diagrams

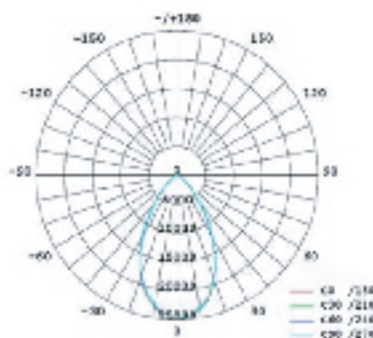

Similar products

Aten



100W	>12000 Lm
150W	>18000 Lm
200W	>24000 Lm
220W	>26400 Lm

Unix



50W	>6000 Lm
80W	>9600 Lm
100W	>12000 Lm
120W	>14400 Lm
150W	>18000 Lm
180W	>21600 Lm
200W	>24000 Lm
230W	>27600 Lm

Viper



80W	2150 Lm / 2400 Lm / 2650 Lm
100W	1380 Lm / 1395 Lm / 1425 Lm
150W	1650 Lm / 1680 Lm / 1710 Lm
180W	2300 Lm / 2325 Lm / 2375 Lm
200W	3220 Lm / 3255 Lm / 3325 Lm

Apolo



500W	>60000 Lm
1000W	>120000 Lm
150W	1650 Lm / 1680 Lm / 1710 Lm
180W	2300 Lm / 2325 Lm / 2375 Lm
200W	3220 Lm / 3255 Lm / 3325 Lm